



VITI AUTOFORANTI A TESTA CILINDRICA CON CALOTTA E IMPRONTA A CROCE PH

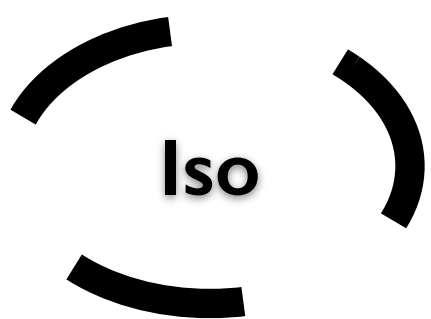

|                               |      |           |            |           |          |          |            |
|-------------------------------|------|-----------|------------|-----------|----------|----------|------------|
| d                             |      | 2,9       | 3,5        | 3,9       | 4,2      | 4,8      | 5,5        |
| N.° ISO                       |      | 4         | 6          | 7         | 8        | 10       | 12         |
| D                             | min. | 5,3       | 6,54       | 7,14      | 7,84     | 9,14     | 10,37      |
|                               | max. | 5,6       | 6,9        | 7,5       | 8,2      | 9,5      | 10,8       |
| K                             | min. | 1,95      | 2,35       | 2,55      | 2,75     | 3,25     | 3,65       |
|                               | max. | 2,2       | 2,6        | 2,8       | 3,05     | 3,55     | 3,95       |
| Spessore foratura consigliata |      | 0,7 - 1,9 | 0,7 - 2,25 | 0,7 - 2,4 | 1,75 - 3 | 1,75 - 4 | 1,75 - 4,5 |
|                               |      |           |            |           |          |          |            |

|     |         |
|-----|---------|
| I   |         |
| mm  | pollici |
| 9,5 | 3/8"    |
| 13  | 1/2"    |
| 16  | 5/8"    |
| 19  | 3/4"    |
| 22  | 7/8"    |
| 25  | 1"      |
| 32  | 1" 1/4  |
| 38  | 1" 1/2  |
| 45  | 1" 3/4  |
| 50  | 2"      |

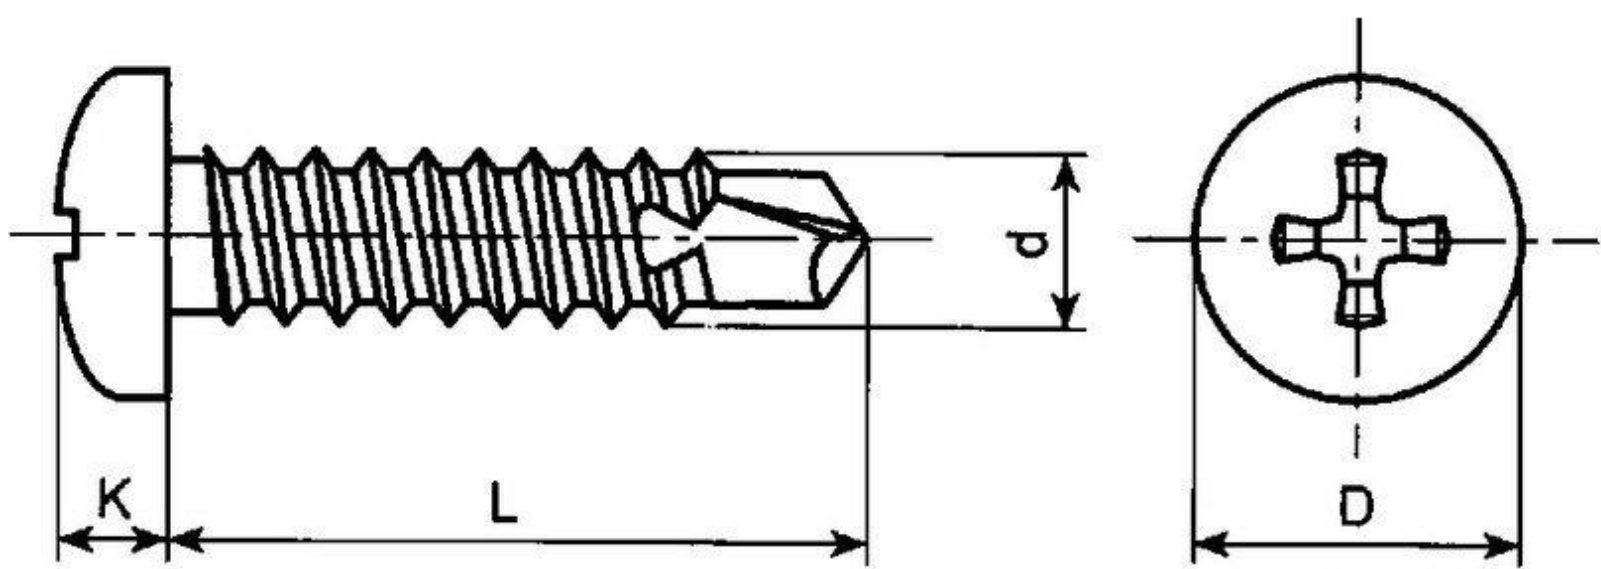

V18